


4.0MP Humanoid Detection IP Camera: H.265 4.0Megapixel IR PoE Bullet IP Camera

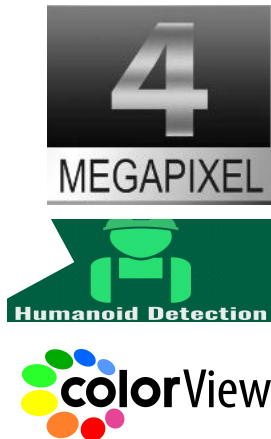


Description:
VSENSE
AVC-68IP4030VU

AVC-68IP4030VU, 4.0MP Full color Bullet IP camera provides real 4.0 megapixel video at a surprisingly. Built-in features set Human detection along with ICR Filter for True Day/Night operation, H.264 & new High Efficiency H.265 video compression, Dual Light Smart IR with 30 meter long range, Built-in Microphone for audio record with HD resolutions up to 4MP@ 2560×1440, this 4MP IP camera delivers top performance in day or night conditions. Powered by PoE or 12V DC and latest ONVIF compliance, Excellent image quality, it can get perfect image in a variety of night mode or lighting conditions. It's suitable for Indoor/ Outdoor environment where light low at night.

Key Features:

1. Real 4.0Megapixel High resolution CMOS Sensor
2. Human Detection frame 5fps, detect 5 people at the same time
3. Support low bit rate and low latency
4. H.265/H.264, save bandwidth and storage space
5. Support Smart IR to avoid Infrared over-exposure at night
6. ICR auto switch, realize D&N surveillance
7. Support 3D DNR and digital WDR
8. Auto-electronic shutter to suit different surveillance environment
9. Support HTTPS transmission with password
10. ONVIF, SLINK, email, NTP service Support
11. Change the password when the initial device is started to ensure the password security
12. IP66 Waterproof rating, Metal Body

Dimension:

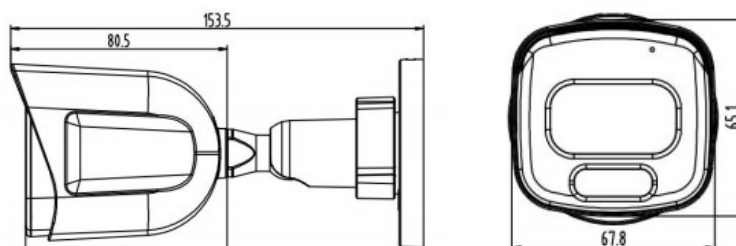

Model	AVC-68IP4030VU
Param	
Camera	
Sensor	1/2.7" Megapixels CMOS
Lens	3.6mm lens
Dual Light	Infrared led 30m; Warm light 25m
D-WDR	D-WDR (off/low/middle/high)
IR Led Control	Auto/Manual/Off
DNR	Off/Low/Middle/High/Higher
Defog	Off/Low/Middle/High
Mirror	Off/ Horizontal Mirror/Vertical Mirror/180 degree flip
Image Setting	Brightness, Contrast,Sharpness,Saturation, Chroma
Humanoid Detection	
Detection Quantity	≤5 people humanoid
Humanoid Size	Humanoid Pixel≥ 40X40
Detection Ratio	≥99% (meet above requirement)
Capture Speed	≤1s
Max Detection Frame	5fps/s
Fault Detection Ratio	≤2%
Detection Part	People with any posture including half body, head, hand, shoulder
Track People	Support
Detection Mode	Support static and dynamic humanoid detection
Detection method	Support visible light image detection, and near infrared image detection
Detection Area	Appointed area, default full-screen
Upload Method	Upload it under private protocol
Trigger Method	Video trigger
Audio & Video Encoding	
Video Encode Standard	H.265/H.264
Encoding Feature	Main code stream: 4MP(2560x1440) @20fps
	Sub-code stream:D1(720*576),VGA(640*360)
Video Code Rate	Fixed code rate, variable code rate, Main stream code: 160Kbps-4000kbps)
Video Type	Composited stream/video stream
Audio Standard	G.711u / 64Kbps, Built in Microphone
Network Function	
Protocol	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP
Connection Protocol	ONVIF, SLINK
Preview Video Quantity	5 pcs
Motion Detection	Set detection area, can set multi-level sensitivity
Security Mode	Authorized user name and password, HTTPS with password, AES connecting with password, RTSP verification

Privacy Mask Alarm	Support 1 area setting
Privacy Mask	Support 4 area privacy mask
Schedule Linkage	Capture, email
Equipment Anomaly Inspection	Support network broken alarm, IP conflict alarm, illegal visiting alarm
Character Overlay (OSD)	Title,time and date overlay, multi-line OSD, OSD color is optional
Port	
Network Port	RJ45 10M/100M network self-adjustable
General	
Power Supply	DC12V /POE (Power over Ethernet)
Size	153.5.00(W)*67.8(H)mm
Working Temperature	-20°C ~ 50°C
Working Humidity	0%~90%

Interface

